



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R1W

SEC 32 | SEC 33  
SEC 5 | SEC 4

U.S.B.&M.

Z-9




SCALE: 1"=30'



LINE	BEARING	DISTANCE	L8	N 55°46'06" W	47.96'
L1	N 63°43'39" W	76.12'	L9	N 46°17'38" W	44.16'
L2	S 56°40'58" E	61.39'	L10	N 27°24'02" W	69.64'
L3	N 51°01'05" W	54.18'	L11	S 68°28'29" W	90.26'
L4	N 32°47'51" W	60.83'			
L5	S 24°29'09" W	70.94'			
L6	N 36°03'20" E	54.94'			
L7	N 49°06'30" E	48.27'			

FOUND A 5/8" X 24" REBAR  
WITH A 2 1/2" ALUMINUM  
DUCHESNE COUNTY MONUMENT  
AT 1/4 CORNER

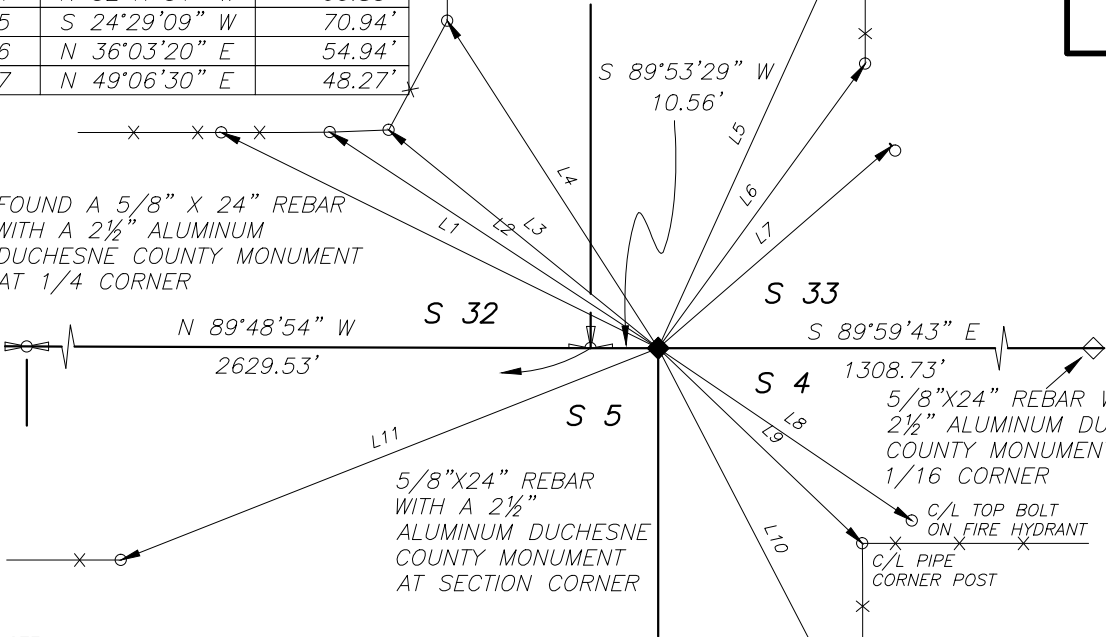

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED  
FROM G.P.S. OBSERVATIONS AT A CONTROL POINT  
(SECTION CORNER) LOCATED AT LAT. 40°23'20.57790"N  
AND LONG. 110°01'46.98583"W USING THE UTAH STATE  
G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK  
MAINTAINED AND OPERATED BY THE AUTOMATED  
GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND AN ALUMINUM DUCHESNE  
COUNTY MONUMENT AT THE POSITION  
OF THE SECTION CORNER



DESCRIPTION OF MONUMENT AND ACCESSORIES  
ESTABLISHED TO PERPETUATE THE ORIGINAL  
LOCATION OF THE CORNER

SET A 5/8"X24" REBAR WITH A 2 1/2"  
ALUMINUM DUCHESNE COUNTY  
MONUMENT IN THE COUNTY ROAD AT  
THE POSITION OF THE SECTION  
CORNER

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7329885.758  
E: 2054872.587  
NAVD88 EL: 5991.72'

LATITUDE: 40°25'58.62895" N  
LONGITUDE: 110°00'39.88049" W  
ELLIPSOID HEIGHT: 5938.24'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300010S0010W0\_300700

CERTIFICATION

I Jerry D. Allred , Professional Land Surveyor, State of Utah, do  
hereby certify that I have performed or reviewed the work done on the  
diagrammed corner as reported on this recordation form and approve same

Date 28 FEB 2018

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

